

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | |
|---|--|----|---|
| (51) International Patent Classification ⁶ : H04N 7/30 | | A1 | (11) International Publication Number: WO 98/36573 |
| | | | (43) International Publication Date: 20 August 1998 (20.08.98) |
| (21) International Application Number: PCT/US98/01319 | | | (81) Designated States: CA, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). |
| (22) International Filing Date: 23 January 1998 (23.01.98) | | | |
| (30) Priority Data: 60/038,016 14 February 1997 (14.02.97) US 08/899,096 24 July 1997 (24.07.97) US | | | |
| (71) Applicant: AT & T CORPORATION [US/US]; 32 Avenue of the Americas, New York, NY 10013-2412 (US). | | | |
| (72) Inventors: HASKELL, Barin, Geoffry; 82 Glenwood Drive, Tinton Falls, NJ 07724 (US). PURI, Atul; 3660 Waldo Avenue #1A, Riverdale, NY 10463 (US). SCHMIDT, Robert, Lewis; 333 Oak Glen Road, Howell, NJ 07731 (US). | | | |
| (74) Agents: RESTAINO, Thomas, A. et al.; AT & T Corporation, P.O. Box 4110, Middletown, NJ 07748 (US). | | | |

Published

With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: NON-LINEAR QUANTIZER FOR VIDEO CODING

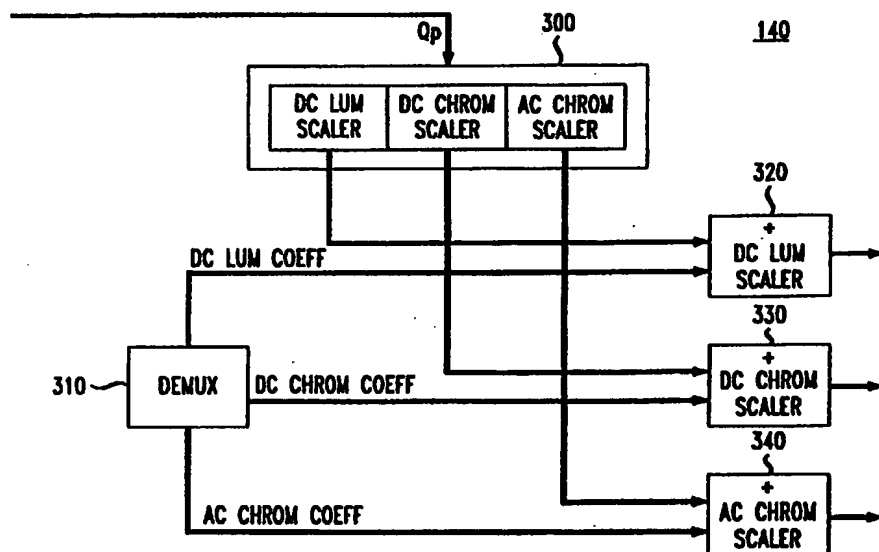

(57) Abstract

A quantizer and dequantizer for use in a video coding system that applies non linear, piece-wise linear scaling functions to video information signals based on a value of a variable quantization parameter. The quantizer and dequantizer apply different non linear, piece-wise linear scaling functions to a DC luminance signal, a DC chrominance signal and an AC chrominance signal. A code for reporting updates of the value of the quantization parameter is interpreted to require larger changes when the quantization parameter initially is large and smaller changes when the quantization parameter initially is small.

NON-LINEAR QUANTIZER FOR VIDEO CODING

RELATED APPLICATION

This application claims the benefit of priority
5 afforded by provisional application no. 60/038,016 filed
February 14, 1997, the disclosure of which is incorporated
herein.

BACKGROUND OF THE INVENTION

10 The present invention related to a quantizer for use
in image coding.

It is known to scale discrete cosine transformation
coefficients in video coding applications to conserve
bandwidth. Known systems either scale by a small
15 constant, such as divide by 8, or scale by a linear
scaling factor that is twice a quantization parameter ($2 \times Q_p$). Scaling by the small constant does not achieve
significant bandwidth savings. Scaling by the $2 \times Q_p$ linear
scaling function achieves significant bit savings, but
20 results in poor image quality at lower and mid-level Q_p
values particularly in the chrominance video signals.
Accordingly, there is a need in the art. for a quantizer
characterized by a scaling function that achieves good
signal quality, and achieves bit rate savings for all
25 values of Q_p particularly for chrominance.

An encoder and decoder must use the same quantization parameter to encode and decode video information intelligibly. Known systems report changes to the quantization parameter with codes that cause changes in Q_p with a uniform step size, regardless of the value of Q_p .

Experience teaches that, at low values of Q_p , changes in Q_p are relatively small. However, for large values of Q_p , changes in Q_p values are relatively large. Systems that allocate additional bits to report the larger Q_p changes waste bandwidth at the lower Q_p values where the large changes do not occur. However, systems that limit the number of bits available to coding Q_p changes may become saturated if larger changes must be coded. Accordingly, there is a need in the art for a quantizer that reports both large and small changes in Q_p with a minimum number of bits.

SUMMARY OF THE INVENTION

The disadvantages of the art are alleviated to a great extent by a quantizer that applies a non-linear scaling function based on the quantization parameter. A different scaling function applies for luminance data than chrominance data. Both scaling functions at low Q_p values approximate constant scaling functions. At large Q_p values, the luminance scaling function approximates a $2 \cdot Q_p$ scaling function and the chrominance scaling function approximates a $1 \cdot Q_p$ scaling function. The quantizer may include a non-linear scaling function for AC coefficients.

The present invention may include a way to update values of Q_p . Changes in Q_p are reported in a fixed length code, but each code means different things based on the previous values of Q_p . If the previous Q_p value is large, the code represents a larger change than if the previous value of Q_p were small.

BRIEF DESCRIPTION OF THE FIGURES

Fig. 1(a) is a block diagram of a first embodiment of an encoder 100 of the present invention; Fig. 1(b) is a block diagram of a first embodiment of a decoder 200 of the present invention.

Fig. 2 is a block diagram of a portion of the quantizer of Fig. 1.

Fig. 3 is a block diagram of a portion of the scaling circuit of Fig. 1.

DETAILED DESCRIPTION

Fig. 1 shows an encoder 100 constructed in accordance with a first embodiment of the present invention. An analog image signal is presented to the encoder 100. The image signal is sampled and converted to a digital signal by an analog to digital ("A/D") converter 110 using techniques known in the art. The A/D converter 110 generates a digital image signal for a plurality of pixels of the image. Alternatively, the image signal may be presented to the encoder 100 as a digital image signal; in this case, the A/D converter 110 is omitted.

The digital image signal is input to a processing circuit 120. The processing circuit 120 may perform a host of functions. Typically, the processing circuit 120 filters the image data and breaks the image data into a luminance signal component and two chrominance signal components. Additionally, the processing circuit 120 groups image data into blocks of data. Where the digital input signal represents information for a plurality of pixels in a scanning direction, the digital output of the processing circuit 120 represents a block of pixels, for example an 8 pixel by 8 pixel array of image data. The processing circuit 120 outputs image data on a macro block basis. A macro block typically consists of up to four

blocks of luminance data and up to two blocks of chrominance data. The processing circuit 120 may also perform additional functions, such as filtering, to suit individual design criteria.

5 The output of the processing circuit 120 is input to a transform circuit 130. The transform circuit 130 performs a transformation of the image data, such as discrete cosine transform ("DCT") coding, from the pixel domain to a domain of coefficients. A block of 64 pixels
10 is transformed to a block of 64 coefficients. Coefficients output by DCT coding include a single DC coefficient and 63 AC coefficients, few of which are non-zero. The transform circuit 130 outputs blocks of coefficients organized into macro blocks.

15 A quantizer 140 scales the DC and AC coefficients generated by the prediction circuit 150 according to a non-linear scaling function governed by a variable quantization parameter (Q_p). The quantization parameter is a value determined by the bit rate of the channel, the
20 resolution of the image being coded, the type of image coding (intra or inter) and other factors that affect a number of bits that may be allocated to coding of the macro block. Q_p is updated on a macro block by macro block basis; changes in Q_p are reported in an output bitstream.
25 In MPEG coding, Q_p takes on values between 1 and 31. The quantizer 140 reduces bandwidth of the image signal by reducing a number of quantization levels available to encoding the signals. Many small coefficients input to the quantizer 140 are divided down and truncated to zero.
30 The scaled signals are output from the quantizer 140.

The output of the quantizer 140 is input to a prediction circuit 150. The prediction circuit 150 performs gradient prediction analysis to predict the DC coefficient of the block. The prediction circuit 150 may

pass the AC coefficients generated by the transform circuit 130 or, alternatively, may predict AC coefficients of the block. In a preferred mode of operation, the prediction circuit 150 selects between modes of predicting or passing AC coefficients; in this case, the prediction circuit 150 generates an AC prediction flag to identify a mode of operation. The prediction circuit 150 outputs DC coefficient signals and AC coefficient signals (representing either AC coefficients or AC residuals) on a macro block basis and, on a macro block basis optionally, an AC prediction flag.

A variable length coder 160 encodes the output of the quantizer 140. The variable length coder 160 typically is a Huffman encoder that performs run length coding on the scaled signals. A bitstream output from the variable length coder 160 may be transmitted, stored, or put to other uses as are known in the art.

A decoder 200 performs operations that undo the encoding operation described above. A variable length decoder 260 analyzes the bitstream using a complementary process to recover a scaled signal. If a Huffman encoder were used by the encoder 160, a Huffman decoder 260 is used.

A reconstruction circuit 250 performs the identical gradient analysis performed in the prediction circuit 150. The DC residual signal is identified and added to a predicted coefficient to obtain a DC coefficient. Optionally, the reconstruction circuit 250 may identify the AC prediction flag and, based on the status of that flag, interprets the AC information as either AC coefficient information or AC residual information. In the event that AC residual information is present, the reconstruction circuit 250 adds the residual signals to corresponding predicted signals to obtain AC coefficients.

The reconstruction circuit 250 outputs coefficient signals.

A dequantization circuit 240 multiplies the recovered signals by the same scaler values used at the quantizer 140. Of course, those coefficients divided down to zero are not recovered.

An inverse transformation circuit 230 performs the inverse transformation applied by the transform circuit 130 of encoder 100. If DCT transformation were performed, an inverse DCT transformation is applied. So, too, with sub-band coding. The inverse transformation circuit 230 transforms the coefficient information back to the pixel domain.

A processing circuit 220 combines luminance and chrominance signals and may perform such optional features as are desired in particular application. The processing circuit 220 outputs digital signals of pixels ready to be displayed. At this point the signals are fit for display on a digital monitor. If necessary to fit a particular application, the signals may be converted by a digital to analog converter 210 for display on an analog display.

The present invention achieves bit rate savings by applying a non-linear scaler function at the quantizer 140 to obtain bit rate savings at high Q_p levels but ensure high video quality at low Q_p levels. The quantizer 140 applies different scaler functions depending upon the type of data being quantized (luminance or chrominance), the type of coefficient being quantized (DC or AC) and the type of coding (inter or intra) being performed.

NON-LINEAR QUANTIZATION OF DC COEFFICIENTS FOR LUMINANCE AND CHROMINANCE

For DC coefficient information, the scaler functions vary with Q_p . Different piece-wise linear scaler functions

are applied to DC luminance and DC chrominance signals. To minimize objectionable artifacts within the chrominance signal, the DC chrominance scaler is smaller than the DC luminance scaler for all Q_p values.

5 The DC luminance scaler function for low Q_p values is a constant. For large Q_p levels, the DC luminance scaler function approximates a $2*Q_p$ function. The inventors obtained through experimentation the DC scaler function shown in Table 1 below, used in an embodiment of the
10 invention.

 The DC chrominance scaler function is also at a constant at low values Q_p . At high Q_p values, the DC chrominance scaler function approximates a linear scaler function in Q_p . The inventors obtained through
15 experimentation the DC scaler function for chrominance signals shown in Table 1 below, used in a preferred embodiment.

| Component | DC Scaler for Quantizer (Q_p) Range | | | |
|-------------|---|--------------|--------------|---------------|
| | 1 through 4 | 5 through 8 | 9 through 24 | 25 through 31 |
| Luminance | 8 | $2*Q_p$ | Q_p+8 | $2*Q_p-16$ |
| Chrominance | 8 | $(Q_p+13)/2$ | $(Q_p+13)/2$ | Q_p-6 |

Table 1

20 Rather than compute the DC scaler for each value of Q_p , further efficiencies may be obtained by storing the DC
25 scaler functions for luminance and chrominance for all values of Q_p in a memory table at the quantizer 140. In this event, the quantizer 140 includes a small memory of DC scales for luminance and chrominance that may be indexed by Q_p as shown in Table 2 below.

| Q_p | DC Scaler for Luminance | DC Scaler for Chrominance |
|-------|-------------------------|---------------------------|
| 1 | 8 | 8 |
| 2 | 8 | 8 |
| 3 | 8 | 8 |
| 4 | 8 | 8 |
| 5 | 10 | 9 |
| 6 | 12 | 9 |
| 7 | 14 | 10 |
| 8 | 16 | 10 |
| 9 | 17 | 11 |
| 10 | 18 | 11 |
| 11 | 19 | 12 |
| 12 | 20 | 12 |
| 13 | 21 | 13 |
| 14 | 22 | 13 |
| 15 | 23 | 14 |
| 16 | 24 | 14 |
| 17 | 25 | 15 |
| 18 | 26 | 15 |
| 19 | 27 | 16 |
| 20 | 28 | 16 |
| 21 | 29 | 17 |
| 22 | 30 | 17 |
| 23 | 31 | 18 |
| 24 | 32 | 18 |
| 25 | 34 | 19 |
| 26 | 36 | 20 |
| 27 | 38 | 21 |
| 28 | 40 | 22 |
| 29 | 42 | 23 |
| 30 | 44 | 24 |
| 31 | 46 | 25 |

Table 2

35 In operation, the transform circuit 130 outputs macro blocks of data to the quantizer 140. Each macro block

contains as many as four blocks of luminance data and two blocks of chrominance data. A single Q_p value is used for the macro block. Q_p is updated on a macro block by macro block basis.

- 5 Based on the value of Q_p , the quantizer 140 recalls a DC scaling factor for luminance and a DC scaling factor for chrominance determined by the scaling functions at the value of Q_p . For each luminance block, the quantizer 140 generates a DC lum level signal according to:

10
$$\text{DC lum level} = \text{DC lum coefficient} / \text{DC Scaler for Luminance.}$$

For each chrominance block, the quantizer 140 generates a DC chrom level signal according to:

15
$$\text{Chrom DC level} = \text{Chrom DC coefficient} / \text{DC Scaler for Chrominance.}$$

The quantizer 140 outputs each DC lum level signal and each DC chrom level signal.

- 20 The non-linear DC scaling functions of the quantizer 140 may be implemented in hardware as shown in Fig. 2. The Q_p signal is input to a memory 300 that stores the scaler factors defined by the DC luminance and DC chrominance scaler functions. The scaler table 300 may be substituted by a processor (not shown) that computes the scaler factors according to the Q_p value. DC luminance and DC chrominance signals from the transform circuit 130 are isolated by a demultiplexer 310 and routed to respective luminance and chrominance division circuits 320 and 330.
- 25 The DC lum level and DC chrom level signals are generated by these division circuits.
- 30 At the decoder 200, the dequantization circuit 240 performs an inverse quantization operation with the same piece-wise linear scaling functions. Based on the Q_p value
- 35 of the immediately preceding macro block and any Q_p update reported in the incoming bitstream, the dequantization

circuit 240 recalls appropriate scaling factors for DC luminance and DC chrominance signals. For each luminance block, the dequantization circuit 240 generates a luminance DC coefficient according to:

$$\text{Lum DC coefficient} = \text{DC Lum Level} * \text{DC Scaler for Luminance.}$$

For each chrominance block, the scaling circuit 240 generates a DC coefficient according to:

$$\text{Chrom DC coefficient} = \text{Chrom DC Level} * \text{DC Scaler for Chrominance.}$$

The dequantization circuit 240 outputs the reconstructed luminance and chrominance coefficients.

The non-linear DC scaling functions of the dequantization circuit 240 may be implemented in hardware as shown in Fig. 3. The Q_p signal is input to a memory 400 that stores the scaler factors defined by the DC luminance and DC chrominance scaler functions. The scaler table 400 may be substituted by a processor (not shown) that computes the scaler factors according to the Q_p signal. DC lum level and DC chrom level signals from the variable length encoder 260 are isolated by a demultiplexer 410 and routed to respective luminance and chrominance multiplication circuits 420 and 430. DC luminance coefficients and DC chrominance coefficients are generated by these multiplication circuits.

The non-linear DC scaling factors described above are appropriate to both intra and inter coding operations. However, experience teaches that DC coefficients obtained from inter coding often are near zero. When quantized even by a constant scaling factor, the DC coefficients obtained from inter coding often are truncated to zero. Accordingly, to reduce complexity in a preferred embodiment, the non-linear scaling function may be disabled during inter coding operations. The DC

coefficients obtained from inter coding may be quantized in a manner similar to the quantization of AC coefficients, discussed below.

The non-linear DC scaling functions maintain high coding quality at low Q_p values and achieve significant bit rate savings at high Q_p values. The quantizer 140 and dequantization circuit 240 of the present invention may find use in applications where image quality is a more significant consideration than bit rate savings. Accordingly, in a preferred embodiment, the quantizer 140 and scaler circuit 240 may have two modes of operation: A first mode applying non-linear scaling functions based on values of Q_p as described above, and a second mode applying a constant scaling factor (such as divide by 8) or even one of a plurality of constant scaling factors (such as divide by 8, 4, 2 or 1). In this embodiment, the quantizer 140 generates a scaler flag signal identifying which mode of operation is being used. The dequantization circuit 240, upon receipt of the scaler flag signal, invokes an appropriate mode of operation to generate coefficients. The scaler flag signal may be a one bit signal when discriminating among the two modes, but may be larger when discriminating among the two modes and additionally identifying which of constant scaling factors is invoked.

NON-LINEAR QUANTIZATION OF CHROMINANCE COEFFICIENTS FOR INTER CODED BLOCKS

In inter coding, both DC and AC coefficients of chrominance blocks may be close to zero. Coding of such coefficients with non-linear scaling functions may improve coding quality of the chrominance signal. Additionally, the non-linear scaling functions of this section may be

applied to AC coefficients of chrominance blocks in intra coding to achieve coding efficiencies.

The non-linear scaling function for AC chrominance coefficients is piece-wise linear and based on Q_p values.

5 At low values for Q_p , the non-linear scaling function for AC is a constant value, almost half of the level of the scaling function for DC chrominance signals. At high levels for Q_p , the AC scaling function approximates a $Q_p/2$ line. At intermediate levels, the AC scaling function

10 approximates a $Q_p/4$ line. In one preferred embodiment, the AC scaling function for chrominance was derived experimentally as shown in Table 3 below:

| Component | Quantizer for Chrominance when Q_p in Range | | | |
|-------------|---|----------------|----------------|---------------|
| | 1 through 4 | 5 through 8 | 9 through 24 | 25 through 31 |
| Chrominance | 4 | $(Q_p + 13)/4$ | $(Q_p + 13)/4$ | $(Q_p - 6)/2$ |

Table 3

The AC scaling factors for chrominance also may be stored in the quantizer 140 in a memory table indexed by Q_p .

During coding, the quantizer 140 recalls or computes

20 a scaling factor for AC coefficients based on the value of Q_p . For each chrominance AC coefficient, the quantizer 140 generates a corresponding chrominance AC level signal according to:

25 Chrom AC level = Chrom AC coefficient / Quantizer for Chrominance.

The quantizer 140 outputs the Chrom AC level signals for the AC coefficients.

The non-linear scaling functions for AC chrominance

30 coefficients may be implemented in hardware, also shown in Fig. 2. The scaler table 300 stores the AC chrominance scaler values indexed by Q_p . If scaler table 300 is substituted by a processor, the processor computes the AC chrominance scaler values according to the Q_p value. AC

chrominance signals from the transform circuit 140 are isolated by a demultiplexer 310 and routed to an AC division circuit 340. The AC chrom level signals are generated by the division circuit 340.

- 5 During decoding, the dequantization circuit 240 recalls the AC scaling factor for chrominance based on the value of Q_p used for the immediately previous macro block and any Q_p update provided in the incoming bitstream. For each AC chrominance level signal, the scaling circuit 240
10 reconstructs a corresponding AC chrominance coefficient according to:

$$\text{Chrom AC coefficient} = \text{Chrom AC Level} * \text{Quantizer for Chrominance.}$$

- 15 The scaling circuit 240 outputs the reconstructed chrominance AC coefficients.

The scaling circuit's non-linear AC scaling functions may be implemented in hardware, also shown in Fig. 3. The scaler table 400 stores the AC chrominance scaler values
20 indexed by Q_p . If scaler table 400 is substituted by a processor, the processor computes the AC scaler value according to the Q_p signal. AC chrom level signals from the variable length encoder 160 are isolated by a demultiplexer 410 and routed to an AC multiplication
25 circuit 440. The AC coefficients are generated by the multiplication circuit 440.

QUANTIZER UPDATE

- The encoder 100 and decoder 200 each must use the
30 same Q_p value for video signals to be encoded and decoded intelligibly. The encoder 100 may change a value of Q_p as frequently as every macro block. When the encoder 100 changes Q_p , it reports the change in a Q_p update signal in the output bitstream.

The present invention provides for an improved method of reporting updated Q_p values to the decoder 200. For each Q_p update, the magnitude of the Q_p adjustment depends not only on the update signal but also the previous value of Q_p . A given Q_p update signal at a large value of Q_p results in a relatively large change in Q_p . The same Q_p update signal at a small value of Q_p results in a smaller change in Q_p . The following Table 4 demonstrates Q_p adjustments made based on the Q_p update signal and the value of Q_p in one preferred embodiment of the invention.

| DQuant Code | Qp Change Based on Qp Value | | | |
|-------------|-----------------------------|--------------|---------------|---------------|
| | 1 through 6 | 7 through 13 | 14 through 21 | 22 through 31 |
| 00 | -1 | -1 | -2 | -3 |
| 01 | -2 | -3 | -4 | -5 |
| 10 | 1 | 1 | 2 | 3 |
| 11 | 2 | 3 | 4 | 5 |

Table 4

Providing variable step sizes for Q_p updates based on the value of Q_p provides resistance to saturation for large changes of Q_p at the encoder 100. The variable step sizes provide increased flexibility without requiring additional overhead because the previous value of Q_p is known at the decoder 200 and need not be reported in the bitstream.

WE CLAIM:

- 1 1. A quantizer for scaling a video information signal
2 comprising:
3 a scaling factor generator employing a non-linear
4 scaling function, and
5 a divider for dividing the video information signal
6 by a scaling factor provided by the scaling factor
7 generator.
- 1 2. The quantizer of claim 1, wherein the scaling factor
2 generator includes a memory in which scale factors are
3 stored.
- 1 3. The quantizer of claim 1, wherein the scaling factor
2 generator is a processor that computes the scaling
3 factors.
- 1 4. The quantizer of claim 1, wherein:
2 the video information contains luminance information,
3 the scaling factor generator generates a luminance
4 scaling factor, and
5 the divider divides the luminance information by the
6 luminance scaling factor and generates a luminance level
7 signal therefrom.
- 1 5. The quantizer of claim 4, wherein the luminance
2 scaling factor is generated from a luminance scaling
3 function based on a quantization parameter, and
4 wherein the luminance scaling function approximates
5 a constant level for low values of the quantization
6 parameter and approximates a line representing twice the
7 quantization parameter for large values of the
8 quantization parameter.

1 6. The quantizer of claim 4, wherein the luminance
2 scaling factor is generated from a piece-wise luminance
3 scaling function based on a quantization parameter.

1 7. The quantizer of claim 1, wherein:
2 the video information contains DC chrominance
3 information,
4 the scaling factor generator generates a chrominance
5 scaling factor, and
6 the divider divides the DC chrominance information by
7 the chrominance scaling factor and generates a chrominance
8 level signal therefrom.

1 8. The quantizer of claim 7, wherein the chrominance
2 scaling factor is generated from a non-linear chrominance
3 scaling function based on a quantization parameter, and
4 wherein the chrominance scaling function approximates
5 a constant level for low values of the quantization
6 parameter and approximates a line representing the
7 quantization parameter for large values of the
8 quantization parameter.

1 9. The quantizer of claim 7, wherein the chrominance
2 scaling factor is generated from a piece-wise chrominance
3 scaling function based on a quantization parameter.

1 10. The quantizer of claim 1, wherein:
2 the video information contains luminance and
3 chrominance information,
4 the scaling factor generator generates a luminance
5 scaling factor and a chrominance scaling factor, and
6 the divider comprises:
7 a first divider that divides the luminance
8 information by the luminance scaling factor and generates

9 a luminance level signal therefrom, and
10 a second divider that divides the chrominance
11 information by the chrominance scaling factor and
12 generates a chrominance level signal therefrom.

1 11. The quantizer of claim 10, wherein
2 the luminance scaling factor is generated from a
3 piece-wise luminance scaling function based on a
4 quantization parameter,
5 the chrominance scaling factor is generated from a
6 piecewise chrominance scaling function based on the
7 quantization parameter, and
8 for all values of the quantization parameter, the
9 chrominance scaling function is less than the luminance
10 scaling function.

1 12. The quantizer of claim 1, wherein:
2 the video information contains AC chrominance
3 information,
4 the scaling factor generator generates an AC
5 chrominance scaling factor, and
6 the divider divides the AC chrominance information by
7 the AC chrominance scaling factor and generates an AC
8 chrominance level signal therefrom.

1 13. The quantizer of claim 12, wherein the AC chrominance
2 scaling factor is generated from an AC chrominance scaling
3 function based on a quantization parameter, and
4 wherein the AC chrominance scaling function
5 approximates a constant level for low values of the
6 quantization parameter and approximates a line
7 representing one half the quantization parameter for large
8 values of the quantization parameter.

1 14. The quantizer of claim 12, wherein the AC chrominance
2 scaling factor is generated from a piece-wise AC
3 chrominance scaling function based on a quantization
4 parameter.

1 15. A dequantizer for scaling a signal containing a
2 quantized video information signal comprising:
3 a scaling factor generator generating a scaling
4 factor generator based on a non-linear scaling function,
5 and
6 a multiplier for multiplying the quantized video
7 information signal by the scaling factor.

1 16. The dequantizer of claim 15, wherein the scaling
2 factor generator is a memory stored with scale factors.

1 17. The dequantizer of claim 15, wherein the scaling
2 factor generator is a processor that computes the scaling
3 factors.

1 18. The dequantizer of claim 15, wherein:
2 the quantized video information contains a luminance
3 level signal,
4 the scaling factor generator generates a luminance
5 scaling factor, and
6 the multiplier multiplies the luminance level signal
7 by the luminance scaling factor and generates a luminance
8 information signal therefrom.

1 19. The dequantizer of claim 18, wherein the luminance
2 scaling factor is generated from a luminance scaling
3 function based on a quantization parameter, and
4 wherein the luminance scaling function approximates
5 a constant level for low values of the quantization

6 parameter and approximates a line representing twice the
7 quantization parameter for large values of the
8 quantization parameter.

1 20. The dequantizer of claim 18, wherein the luminance
2 scaling factor is generated from a piece-wise luminance
3 scaling function based on a quantization parameter.

1 21. The dequantizer of claim 15, wherein:
2 the quantizer video information contains DC
3 chrominance level signal,
4 the scaling factor generator generates a chrominance
5 scaling factor, and
6 the multiplier multiplies the DC chrominance level
7 signal by the chrominance scaling factor and generates a
8 DC chrominance information signal therefrom.

1 22. The dequantizer of claim 21, wherein the chrominance
2 scaling factor is generated from a non-linear chrominance
3 scaling function based on a quantization parameter, and
4 wherein the chrominance scaling function approximates
5 a constant level for low values of the quantization
6 parameter and approximates a line representing the
7 quantization parameter for large values of the
8 quantization parameter.

1 23. The dequantizer of claim 21, wherein the chrominance
2 scaling factor is generated from a piece-wise chrominance
3 scaling function based on a quantization parameter.

1 24. The dequantizer of claim 15, wherein:
2 the video information contains a luminance level
3 signal and chrominance level signal;
4 the scaling factor generator generates a luminance

5 scaling factor and a chrominance scaling factor; and
6 the multiplier comprises:
7 a first multiplier that multiplies the luminance
8 level signal with by the luminance scaling factor and
9 generates a luminance information signal therefrom,
10 and
11 a second multiplier that multiplies the chrominance
12 level signal by the chrominance scaling factor and
13 generates a chrominance information signal therefrom.

1 25. The dequantizer of claim 24, wherein
2 the luminance scaling factor is generated from a
3 piece-wise luminance scaling function based on a
4 quantization parameter,
5 the chrominance scaling factor is generated from a
6 piecewise chrominance scaling function based on the
7 quantization parameter, and
8 for all values of the quantization parameter, the
9 chrominance scaling function is less than the luminance
10 scaling function.

1 26. The dequantizer of claim 15, wherein:
2 the quantized video information contains an AC
3 chrominance level signal,
4 the scaling factor generator generates an AC
5 chrominance scaling factor, and
6 the multiplier multiplies the AC chrominance level
7 signal by the AC chrominance scaling factor and generates
8 an AC chrominance information signal therefrom.

1 27. The dequantizer of claim 26, wherein
2 the AC chrominance scaling factor is generated from
3 an AC chrominance scaling function based on a quantization
4 parameter, and

5 the AC chrominance scaling function approximates a
6 constant level for low values of the quantization
7 parameter and further approximates a line representing one
8 half the quantization parameter for large values of the
9 quantization parameter.

1 28. The dequantizer of claim 26, wherein the AC
2 chrominance scaling factor is generated from a piece-wise
3 AC chrominance scaling function based on a quantization
4 parameter.

1 29. A method of quantizing a video information signal,
2 comprising the steps of:
3 generating a scaling factor based on a non-linear
4 scaling function,
5 dividing the video information signal by the non-
6 linear scaling function, and
7 outputting the divided video information signal.

1 30. A method of dequantizing a quantized video
2 information signal, said video information signal
3 characterized by a plurality of macro blocks, each macro
4 block quantized according to a plurality of quantization
5 parameter, the method comprising the steps of:
6 receiving the quantized video information signal
7 identifying the macro blocks,
8 identifying a quantization parameter update from the
9 quantized video information signal,
10 generating a quantization parameter change based on
11 the quantization parameter and the quantization parameter
12 update,
13 generating a scaling factor for the macro block based
14 on the quantization parameter and the quantization
15 parameter change, and

16 multiplying quantized video information of the macro
17 block by the scaling factor to obtain dequantized video
18 information.

1 31. An encoder for encoding video signals, comprising:
2 a processing circuit that generates blocks of video
3 data from the video information signal,
4 a transform circuit that generates video coefficients
5 representative of the blocks of video data,
6 a quantizer circuit that quantizes the video
7 coefficients according to a non-linear scaler function,
8 and
9 a variable length coder that generates a variable
10 length code based on the quantized video coefficients.

1 32. The encoder of claim 31, wherein the non-linear
2 scaler function is piece-wise linear.

1 33. A decoder for decoding encoded video signals,
2 comprising:
3 a variable length decoder that generates quantized
4 video coefficients from variable length coded contained
5 within the encoded video signals,
6 a dequantizer circuit that dequantizes the video
7 coefficients according to a non-linear scalar function,
8 an inverse transform circuit that transforms the
9 video coefficients into blocks of video data, and
10 a processing circuit that generates a video signal
11 from the blocks of video data.

1 34. The decoder of claim 33, wherein the non-linear
2 scaler function is piece-wise linear.

1/2

FIG. 1A

100

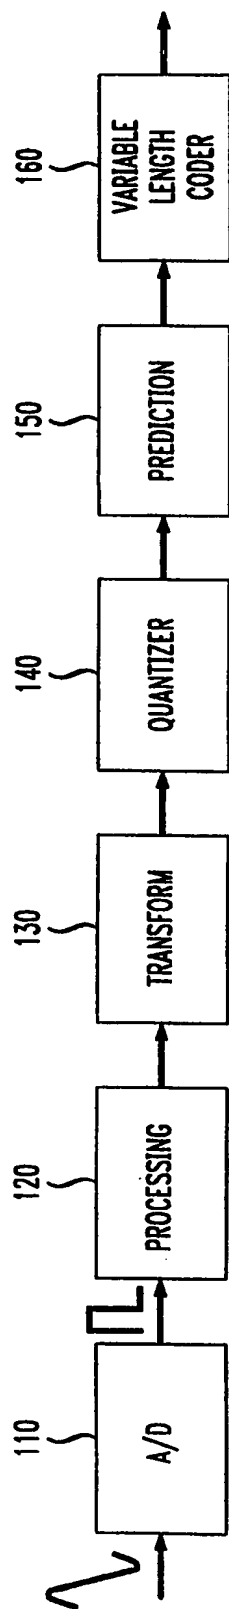


FIG. 1B

200

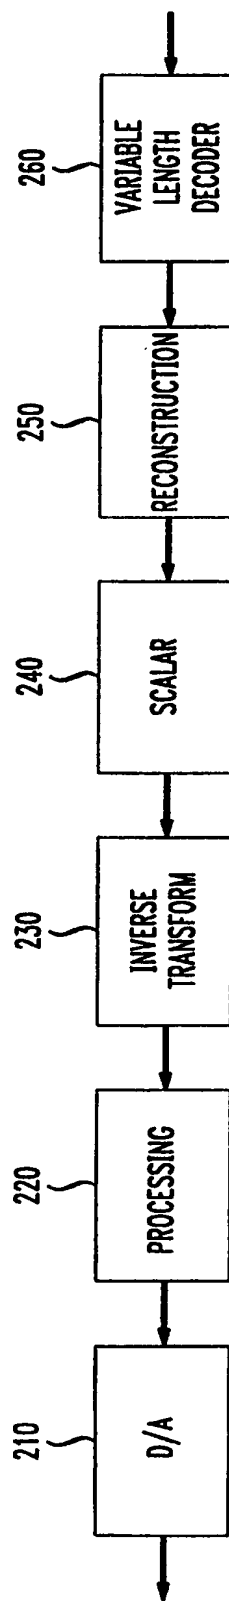


FIG. 2

2/2


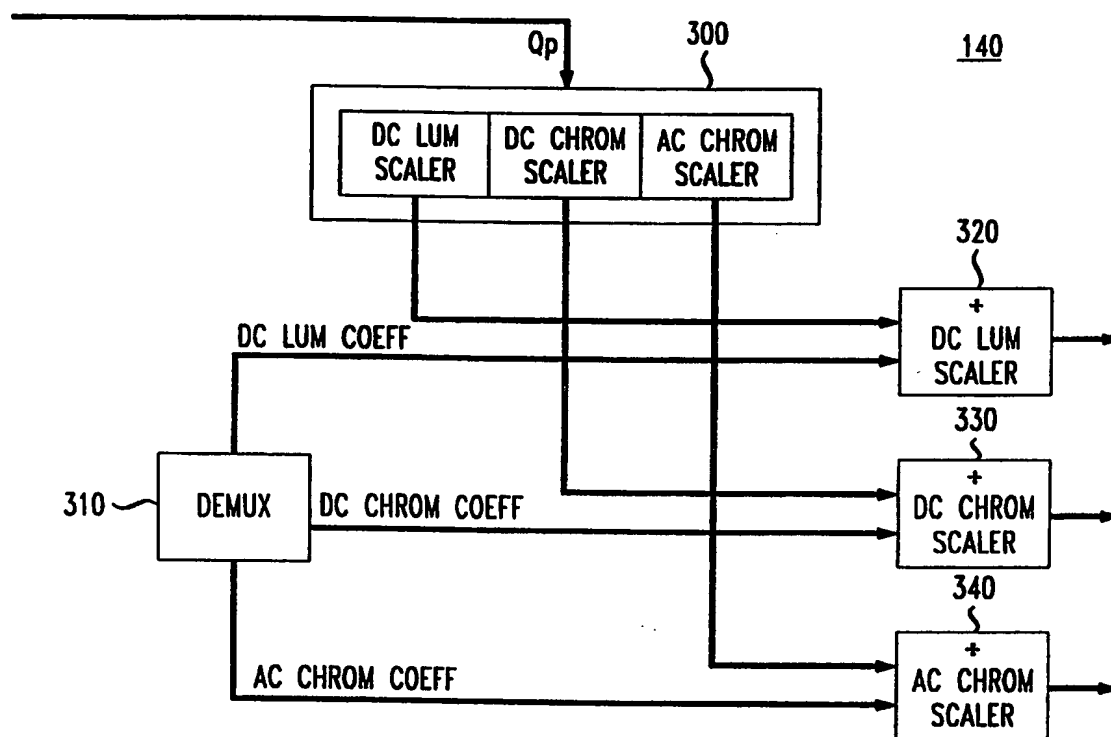


FIG. 3

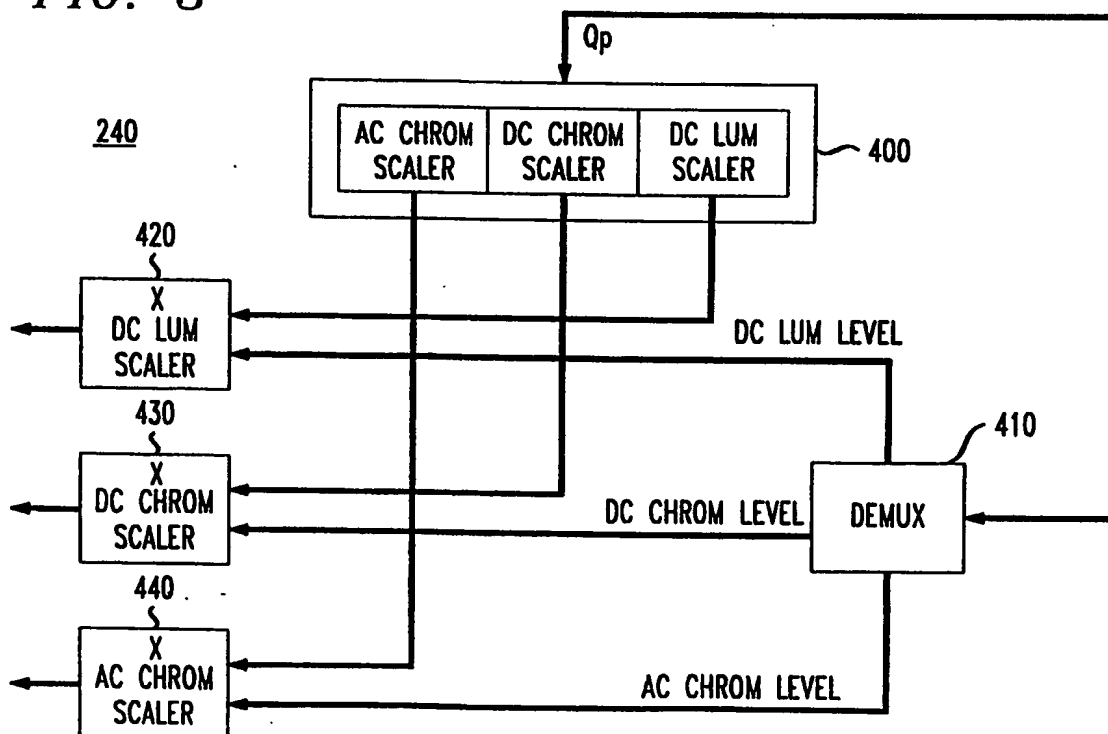

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 98/01319

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N7/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|----------|--|--|
| X | <p>EP 0 517 256 A (SONY CORP) 9 December 1992</p> <p>see page 4, line 32 - page 5, line 25 see page 7, line 9 - line 44 see page 8, line 7 - line 15 see page 9, line 31 - line 44 see page 10, line 17 - line 24 see page 11, line 33 - line 41 see page 13, line 6 - line 12 see figure 1</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/-</p> | <p>1, 3, 4, 6, 7, 9, 10, 12, 14, 15, 17, 18, 20, 21, 23, 24, 26, 28, 29, 31-34</p> |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 May 1998

Date of mailing of the international search report

15/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

La, V

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 98/01319

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|----------|--|---------------------------------------|
| X | <p>US 4 920 414 A (PHILIPS CORP (US)) 24 April 1990</p> <p>see column 2, line 1 - line 20 see column 4, line 18 - column 5, line 65 see column 7, line 11 - line 29 see abstract; figures 1,4,5</p> | <p>1-3, 15-17, 29,31-34</p> |
| X | <p>US 5 493 513 A (INTEL CORP) 20 February 1996</p> <p>see column 23, line 43 - column 24, line 46 see column 27, line 14 - line 55 see column 29, line 46 - column 30, line 20</p> | <p>30</p> |
| A | <p>EP 0 582 819 A (SONY CORP) 16 February 1994</p> <p>see page 2, line 46 - line 48 see page 3, line 47 - line 51 see page 4, line 43 - page 5, line 44 see abstract; figures 11,12</p> | <p>11,25</p> |
| A | <p>EP 0 566 219 A (CANON KK) 20 October 1993</p> <p>see page 2, line 56 - page 3, line 4 see page 3, line 29 - page 4, line 43 see page 5, line 42 - line 49 see abstract; figure 1</p> | <p>11,25</p> |
| A | <p>US 5 170 264 A (FUJI PHOTO FILM) 8 December 1992</p> <p>see column 5, line 42 - column 6, line 34 see column 7, line 1 - column 8, line 2 see column 8, line 49 - line 68 see column 9, line 33 - line 59 see figures 1,2,11B</p> | <p>1-34</p> |
| A | <p>EP 0 400 756 A (PHILIPS NV) 5 December 1990</p> <p>see column 5, line 48 - column 6, line 47 see figures 4A,4B,6</p> | <p>1-34</p> |
| A | <p>EP 0 514 663 A (IBM) 25 November 1992</p> <p>see page 2, line 36 - page 3, line 27 see page 4, line 28 - page 7, line 33</p> | <p>1-14,29, 31,32</p> |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/01319

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| EP 0517256 A | 09-12-1992 | JP 5083696 A | 02-04-1993 |
| | | CA 2070550 A | 08-12-1992 |
| | | US 5321440 A | 14-06-1994 |
| US 4920414 A | 24-04-1990 | FR 2621194 A | 31-03-1989 |
| | | AT 108595 T | 15-07-1994 |
| | | DE 3850627 D | 18-08-1994 |
| | | DE 3850627 T | 23-02-1995 |
| | | EP 0310175 A | 05-04-1989 |
| | | JP 1165283 A | 29-06-1989 |
| | | JP 2661985 B | 08-10-1997 |
| US 5493513 A | 20-02-1996 | US 5535138 A | 09-07-1996 |
| | | US 5539662 A | 23-07-1996 |
| | | US 5539663 A | 23-07-1996 |
| | | US 5528238 A | 18-06-1996 |
| | | US 5537338 A | 16-07-1996 |
| | | US 5559722 A | 24-09-1996 |
| | | US 5532940 A | 02-07-1996 |
| | | US 5493514 A | 20-02-1996 |
| | | US 5508942 A | 16-04-1996 |
| | | US 5511003 A | 23-04-1996 |
| | | US 5488570 A | 30-01-1996 |
| | | US 5515296 A | 07-05-1996 |
| | | US 5638068 A | 10-06-1997 |
| EP 0582819 A | 16-02-1994 | JP 6022292 A | 28-01-1994 |
| | | CA 2099627 A | 31-12-1993 |
| | | US 5374958 A | 20-12-1994 |
| EP 0566219 A | 20-10-1993 | JP 4323960 A | 13-11-1992 |
| | | DE 69216898 D | 06-03-1997 |
| | | DE 69216898 T | 28-05-1997 |
| | | EP 0510921 A | 28-10-1992 |
| | | ES 2096719 T | 16-03-1997 |
| | | US 5189530 A | 23-02-1993 |
| | | US 5260808 A | 09-11-1993 |
| US 5170264 A | 08-12-1992 | JP 2203673 A | 13-08-1990 |
| | | JP 2638179 B | 06-08-1997 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/01319

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 5170264 A | | JP 2262785 A | 25-10-1990 |
| | | JP 2552349 B | 13-11-1996 |
| | | JP 2158285 A | 18-06-1990 |
| | | DE 3940554 A | 13-06-1990 |
| EP 0400756 A | 05-12-1990 | US 5128758 A | 07-07-1992 |
| | | CA 2018031 A | 02-12-1990 |
| | | JP 3069295 A | 25-03-1991 |
| | | MX 172405 B | 15-12-1993 |
| | | US 5179442 A | 12-01-1993 |
| EP 0514663 A | 25-11-1992 | JP 2501999 B | 29-05-1996 |
| | | JP 5145773 A | 11-06-1993 |
| | | US 5301242 A | 05-04-1994 |